

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/29816 A1

(51) International Patent Classification⁷: **G11B 33/04, 23/00**

(21) International Application Number: **PCT/GB01/04406**

(22) International Filing Date: **3 October 2001 (03.10.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0024496.2 5 October 2000 (05.10.2000) GB

(71) Applicant (for all designated States except US): **NEXPAK CORPORATION [US/US]; 6370 Wise Avenue, North Canton, OH 44720 (US).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PETTIGREW, Michael [GB/GB]; 60 Thurleigh Road, London SW12 8UD (GB). SAKAGUCHI, Naomitsu [JP/GB]; 17 Rosevine Road, London SW20 8RB (GB).**

(74) Agent: **HANSON, William, Bennett; JY & GW Johnson, Kingsbourne House, 229-231 High Holborn, London WC1V 7DP (GB).**

(81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**


(84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**

Published:

- with international search report
- entirely in electronic form (except for this front page) and available upon request from the International Bureau

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **DISC HOLDING APPARATUS**

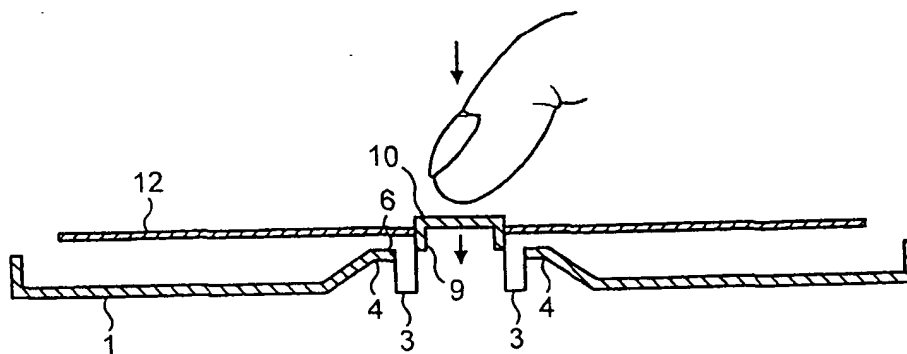

(57) Abstract: Apparatus used for holding a disc (12) including a lower surface and an upper surface with an opening extending between the surfaces, comprises a base (1) and a hub (2) extending upwards from the base. The hub includes a centre portion (6) adapted to pass through the opening of the disc (12) to hold the disc on the hub. The hub (2) includes outer pieces (4), non-movable with respect to the base (1), for arresting downward movement of the disc (12) during its removal.

WO 02/29816 A1

DISC HOLDING APPARATUS

Background to the Invention

This invention relates to a disc holding apparatus used for retaining a disc, in particular
5 a disc on which information is recorded such as an audio compact disc (CD) or CD-ROM, digital versatile disc (DVD) or computer game disc, in a storage case or the like.

Known disc storage cases have a central hub which extends through and engages the
hole in the centre of the disc and which is depressed to remove the disc. One
10 disadvantage of conventional hubs is that they generate an unpleasant cracking sound on removing or replacing the disc. A further disadvantage is that repeated usage of the hub can cause visible cracks and scratches on the centre of the disc, affecting the disc's quality and/or performance.

15 It is known to provide means for causing the disc to be ejected from the hub when the latter is depressed. For example, EP-A-356539 and US-A-5251750 describe outwardly extending cranked ejection arms and WO 96/14636 describes a plurality of inwardly extending resilient cantilevered arms in the base. All of these ejection means are inconvenient to manufacture.

20

Summary of the Invention

The present invention seeks to provide a disc holding apparatus in which both noise and cracking/scratching of the disc during removal or replacement of the disc are minimised.

25

It is also an aim of the invention to provide a disc holding apparatus that is easier to use for consumers, particularly those with co-ordination disabilities.

According to the invention there is provided apparatus for holding a disc including a
30 lower surface and an upper surface with an opening extending between the surfaces, the apparatus comprising a base and a hub extending upwards from the base, the hub including a central portion adapted to pass through the opening of the disc and engage the upper surface of the disc to hold the disc on the hub, characterized in that the hub

includes outer pieces, non-movable with respect to the base, for arresting downward movement of the disc during its removal.

Preferably, there are two outer pieces, and these may have substantially parallel inner
5 edges.

The central portion of the hub may comprise a first wall portion extending upwards from the base and a second wall portion extending inwardly from the first wall portion above the base. A pair of disc-engaging arms, preferably spaced from one another and
10 preferably substantially perpendicular to the second wall portion, may extend upwards from the second wall portion. Preferably, the central portion is arranged to be pushed down from a resting position to a depressed position to release the disc from the hub, and each arm has a portion which engages the upper surface of the disc when the central portion is in the resting position and disengages from the upper surface of the
15 disc when the central portion is moved to the depressed position. The central portion preferably functions as a spring to return it from the depressed position to the resting position.

In a preferred embodiment, the arms include upper walls, which cooperate to form a
20 central push button for the hub.

Brief Description of the Drawings

In order that the invention may be more readily understood, reference will now be made, by way of example only, to the accompanying drawings, in which:

25

Figure 1 is a plan of apparatus according to the invention;

Figure 2A is a section along the line II-II of Figure 1, also showing a disc, with the central portion in the resting position;

30

Figure 2B is a fragmentary section, similar to Figure 2 but with the central portion in the depressed position;

Figure 3A is a section along the line III-III of Figure 1, also showing a disc, with the central portion in the resting position; and

Figure 3B is a section similar to Figure 3 but with the central portion in the depressed position.

The drawings show the portion of a video-style library case for a compact disc or the like adapted to hold the disc. However, it should be understood that the invention also extends to trays provided as inserts in jewel cases, that is clear hinged cases for discs.

10 The case (or alternatively the tray) is preferably injection moulded in one piece from polypropylene or a material with similar characteristics.

The case has a flat base 1, with an upwardly extending substantially circular central hub 2. The hub is divided by two parallel slots 3 into two outer pieces 4 and a central portion 5. The outer pieces 4, formed from segments of the circular hub 2, each have an upwardly sloping outer wall and an abutment surface 6.

The central portion 5 of the hub comprises an upwardly sloping first wall portion 7, and a second wall portion 8 parallel to the base. The wall portions are such that in the absence of the slots 3, in the resting position the upwardly sloping walls of the outer portion would form a continuous frustoconical surface with the first wall portion 7, and the abutment surfaces 6 would form a continuous annular surface with the second wall portion 8.

25 A pair of substantially semicircular disc-engaging arms 9 extends upwardly from the centre of the second wall portion 8. The arms each have an upper wall 10, parallel to the base, and the upper walls together form a central push button for the hub. The outer edge portions 11 of the upper walls 10 extend outwardly from the arms 9 and are radiused in cross-section.

30

Figures 2A and 3A show the central portion of the hub in its resting position with a disc 12 held on the central portion, its central opening being placed over the push button.

The outer upper edge portions 11 engage the upper surface of the disc at the opening therein and retain the disc 12 in place.

By depressing the push button in the direction of the arrow, the entire central portion 5
5 between the slots 3 is depressed. The outer upper edge portions 11 move the disc downwardly until its motion is arrested by the abutment surfaces 6 of the outer hub pieces 4. The disc engaging arms 9 then move together as the radiused upper edge portions 11 move through the opening in the disc, releasing it from engagement as shown in Figure 3A. This may be achieved either with the case on a flat surface or
10 with it held in one hand.

To replace the disc, the user simply places the disc with the opening over the push button and presses the disc down.

CLAIMS

1. Apparatus for holding a disc including a lower surface and an upper surface with an opening extending between the surfaces, the apparatus comprising a base and a
5 hub extending upwards from the base, the hub including a central portion adapted to pass through the opening of the disc and engage the upper surface of the disc to hold the disc on the hub, characterized in that the hub includes outer pieces, non-movable with respect to the base, for arresting downward movement of the disc during its removal.
- 10 2. Apparatus according to claim 1, wherein there are two outer pieces.
3. Apparatus according to claim 2, wherein the outer pieces have substantially mutually parallel inner edges.
- 15 4. Apparatus according to claim 1, 2 or 3, wherein the central portion of the hub comprises a first wall portion extending upwards from the base and a second wall portion extending inwardly from the first wall portion above the base.
- 20 5. Apparatus according to claim 4, wherein a pair of disc-engaging arms extends upwards from the second wall portion.
6. Apparatus according to claim 5, wherein the arms are spaced from one another.
- 25 7. Apparatus according to claim 6, wherein the arms are substantially perpendicular to the second wall portion.
8. Apparatus according to claim 5, 6 or 7, wherein the central portion is arranged to be pushed down from a resting position to a depressed position to release the disc
30 from the hub, and each arm has a portion which engages the upper surface of the disc when the central portion is in the resting position and disengages from the upper surface of the disc when the central portion is moved to the depressed position.

9. Apparatus according to claim 8, wherein said portion which engages the upper surface of the disc comprises a radiused outwardly extending upper edge of the arm.
10. Apparatus according to any one of claims 5 to 9, wherein the arms include upper walls which cooperate to form a central push button for the hub.
11. Apparatus according to claim 1, wherein the central portion is arranged to be moved from a resting position to a depressed position to release the disc from the hub.
- 10 12. Apparatus according to claim 8, 9, 10 or 11, wherein the central portion functions as a spring to return it from the depressed position to the resting position.

1 / 3

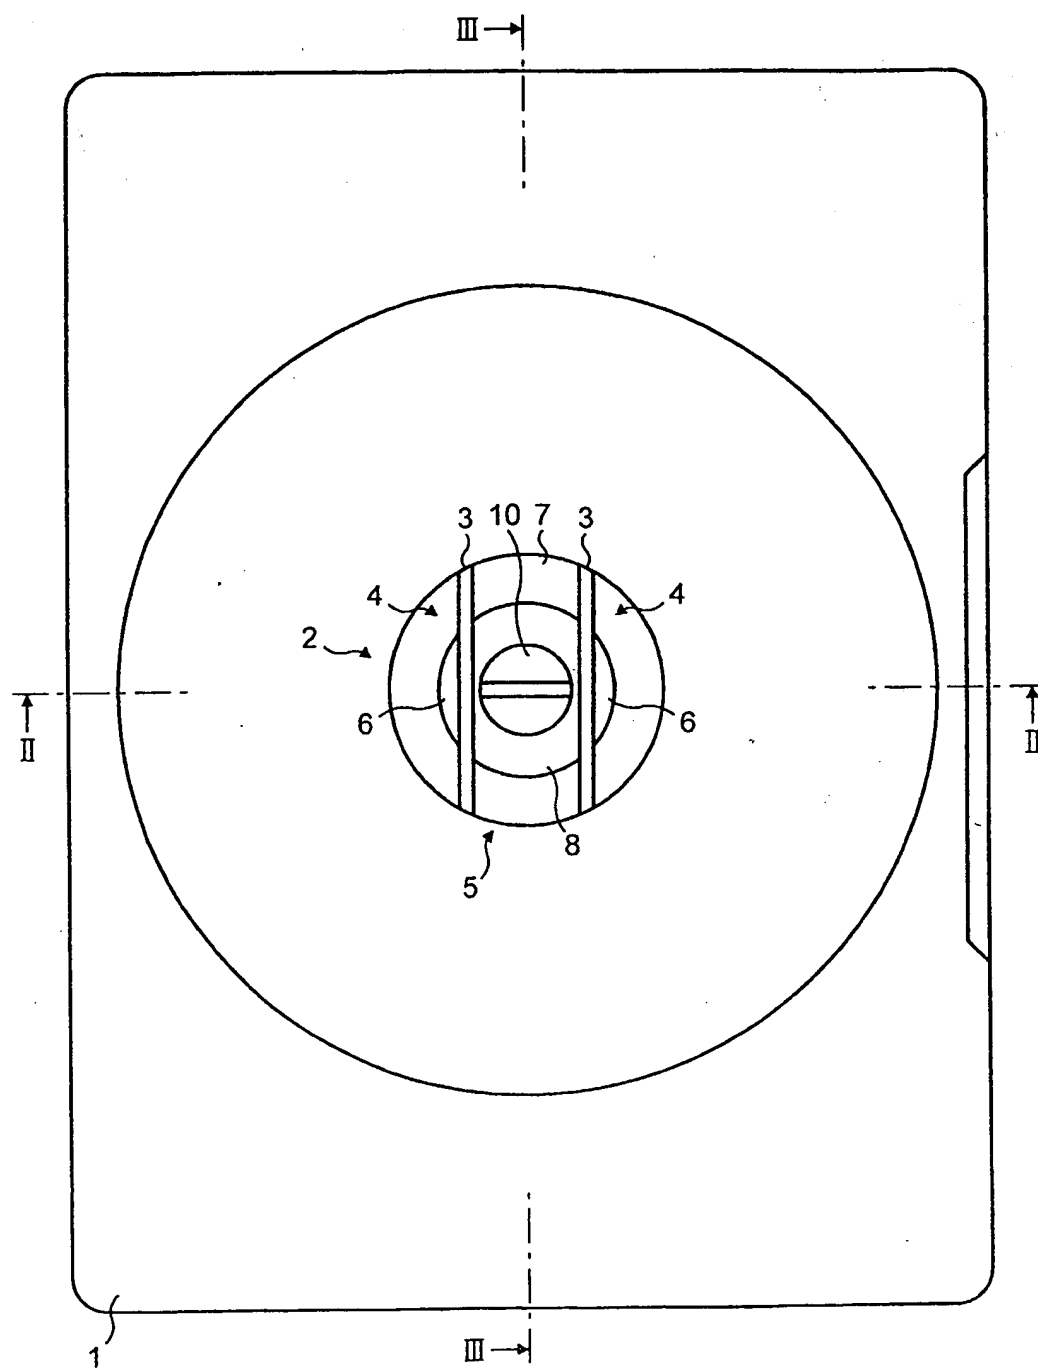


FIG. 1

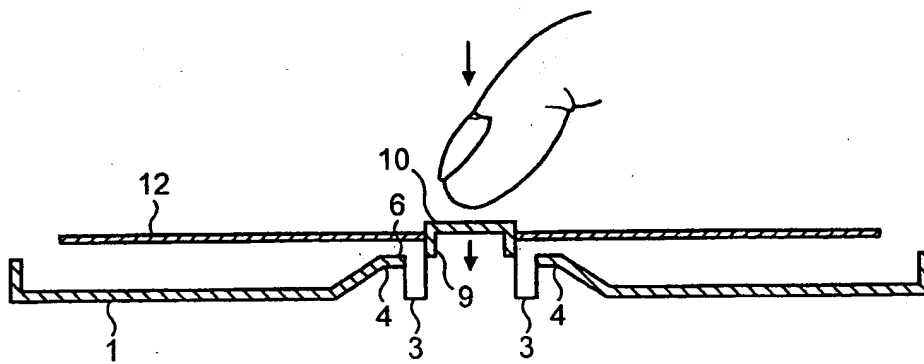


FIG. 2A

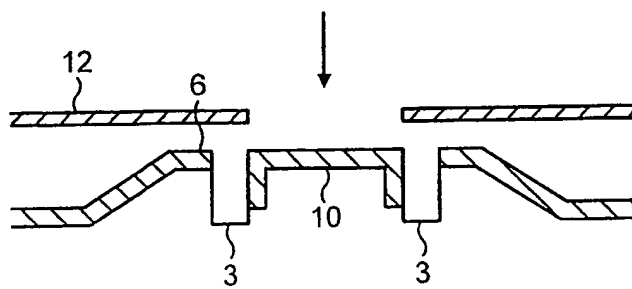


FIG. 2B

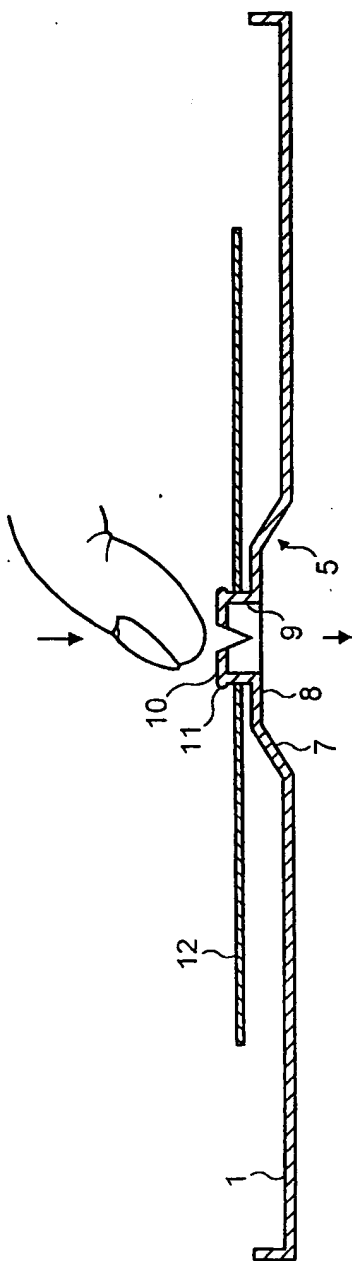


FIG. 3A

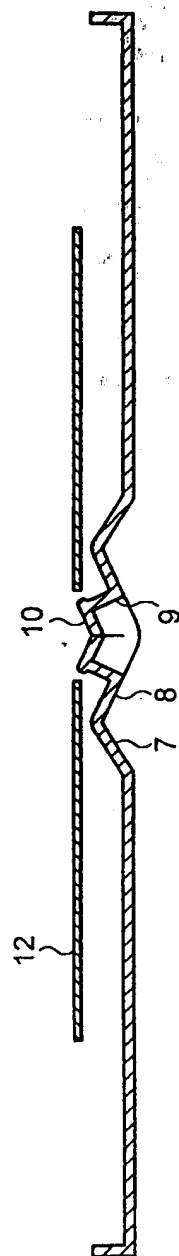


FIG. 3B

INTERNATIONAL SEARCH REPORT

PCT/GB 01/04406

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B33/04 G11B23/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 944 181 A (LAU KWOK DIN) 31 August 1999 (1999-08-31)	1,2,4-12
Y	column 4, line 17 -column 5, line 50; figures	3
Y	FR 2 765 999 A (MOULAGES DU VELAY SA) 15 January 1999 (1999-01-15)	3
A	abstract; figures page 6, line 15 -page 7, line 28	1,2,4-12
X	US 6 085 900 A (WONG CHI MAN) 11 July 2000 (2000-07-11) abstract; figures column 3, line 51 -column 4, line 51	1,2,4-12
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

16 January 2002

Date of mailing of the international search report

24/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Declat, M

INTERNATIONAL SEARCH REPORT

PCT/GB 01/04406

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 34 25 579 A (POLYGRAM GMBH) 16 January 1986 (1986-01-16) page 10, line 13 - line 24; claims 1,4,5; figures ----	1-12
A	US 5 526 926 A (DEJA GUENTER) 18 June 1996 (1996-06-18) abstract; figures ----	1-12
P,X	WO 01 39193 A (FINEST IND CO LTD ;DAVIES PAUL R (CN); LAU KWOK DIN (CN)) 31 May 2001 (2001-05-31) page 5, line 5 -page 8, line 8; figures ----	1-12
P,X	US 6 237 763 B1 (LAU KWOK DIN) 29 May 2001 (2001-05-29) column 4, line 43 -column 5, line 54; figures ----	1,2,4-12
P,X	DE 201 06 714 U (WAH DE ELECTRON CO) 12 July 2001 (2001-07-12) page 4, line 33 -page 6, line 35; figures -----	1,2,4-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 01/04406

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5944181	A	31-08-1999	AU 5644499 A BR 9906942 A CN 1277721 T EP 1112572 A1 WO 0014739 A1	27-03-2000 03-10-2000 20-12-2000 04-07-2001 16-03-2000
FR 2765999	A	15-01-1999	FR 2765999 A1	15-01-1999
US 6085900	A	11-07-2000	AU 2792600 A WO 0051127 A1 EP 1171882 A1	14-09-2000 31-08-2000 16-01-2002
DE 3425579	A	16-01-1986	DE 3425579 A1	16-01-1986
US 5526926	A	18-06-1996	DE 9312288 U1 AT 169146 T AU 672676 B2 AU 5945194 A CN 1100226 A DE 59406545 D1 WO 9425962 A1 EP 0648369 A1 JP 7125785 A	15-09-1994 15-08-1998 10-10-1996 10-11-1994 15-03-1995 03-09-1998 10-11-1994 19-04-1995 16-05-1995
WO 0139193	A	31-05-2001	US 2001047947 A1 AU 1170401 A WO 0139193 A1	06-12-2001 04-06-2001 31-05-2001
US 6237763	B1	29-05-2001	WO 0188918 A1 CN 1323038 A	22-11-2001 21-11-2001
DE 20106714	U	12-07-2001	DE 20106714 U1	12-07-2001